

Produktdatenblatt



Higo - Batterie - F618A

Male panel mount

Push-on flexible

F618AG C 03 VM 0300

<https://www.higoconnector.com/de/e-bike-steckverbinder/f618agc03vm0300>

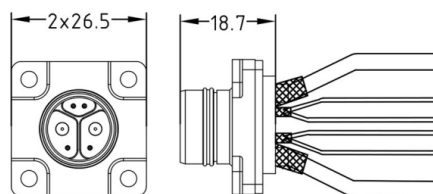

Spezifikationen

General Characteristics

Number of contacts	6 (2+4)
Connector shape	Panel mount
Gender	Male
Color	Black
Upper temperature	80 °C
Lower temperature	-25 °C
Locking	Push-on flexible
IP Protection	IP67
Mating cycles	3000 Times
Connector diameter	26,5 x 26,5 mm
Cable Length	300 mm
Remark	Other cable length/type on request
Wire section in AWG	2 x 12 + 4 x 24 AWG

Produktdatenblatt

Higo - Batterie - F618A

Male panel mount

Electrical Parameters

Rated current	30 / 2 A
Rated voltage	48 V AC / 60 V DC
Max. insulation resistance	$\geq 20 \text{ M}\Omega$
Max. contact resistance	$\leq 10 \text{ m}\Omega$

Material

Insulation wire	Silicone + PVC
Material of contact	Copper alloy
Contact plating	Silver plated