



Higo - Batterie - S828B

Female panel mount connector

Charging & discharging in 1

S828BM C 03 GX 0300

<https://www.higoconnector.com/de/e-bike-steckverbinder/s828bmc03gx0300>

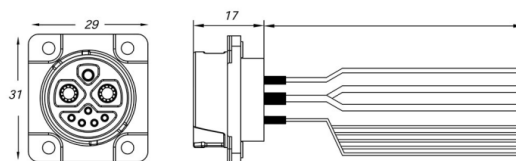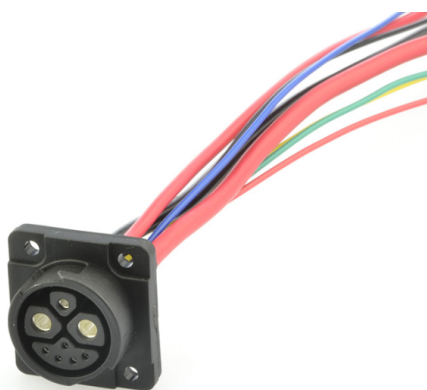

Spezifikationen

General Characteristics

Connector shape	Panel mount
Gender	Female
Color	Black
Upper temperature	80 °C
Lower temperature	-25 °C
Locking	Self-locking
IP Protection	IP67
Mating cycles	3000 Times
Connector diameter	29,0 x 31,0 mm
Cable Length	300 mm
Wire section	2 x 5.0 + 1 x 0.82 + 5 x 0.3 mm ²

Produktdatenblatt

Higo - Batterie - S828B

Female panel mount connector

Electrical Parameters

Rated current	50 / 12 / 2 A
Rated voltage	48 V AC / 60 V DC
Max. insulation resistance	$\geq 20 \text{ M}\Omega$
Max. contact resistance	$\leq 10 \text{ m}\Omega$

Material

Insulation wire	PVC
Material of contact	8 (2+1+5) Phosphor Bronze
Contact plating	Silver plated