

Produktdatenblatt


Higo - Signal - Micro A

Micro A male angled plug

Push-on (no locking)

Z205AG A 00 GS 1000

<https://www.higoconnector.com/de/e-bike-steckverbinder/z205aga00gs1000>

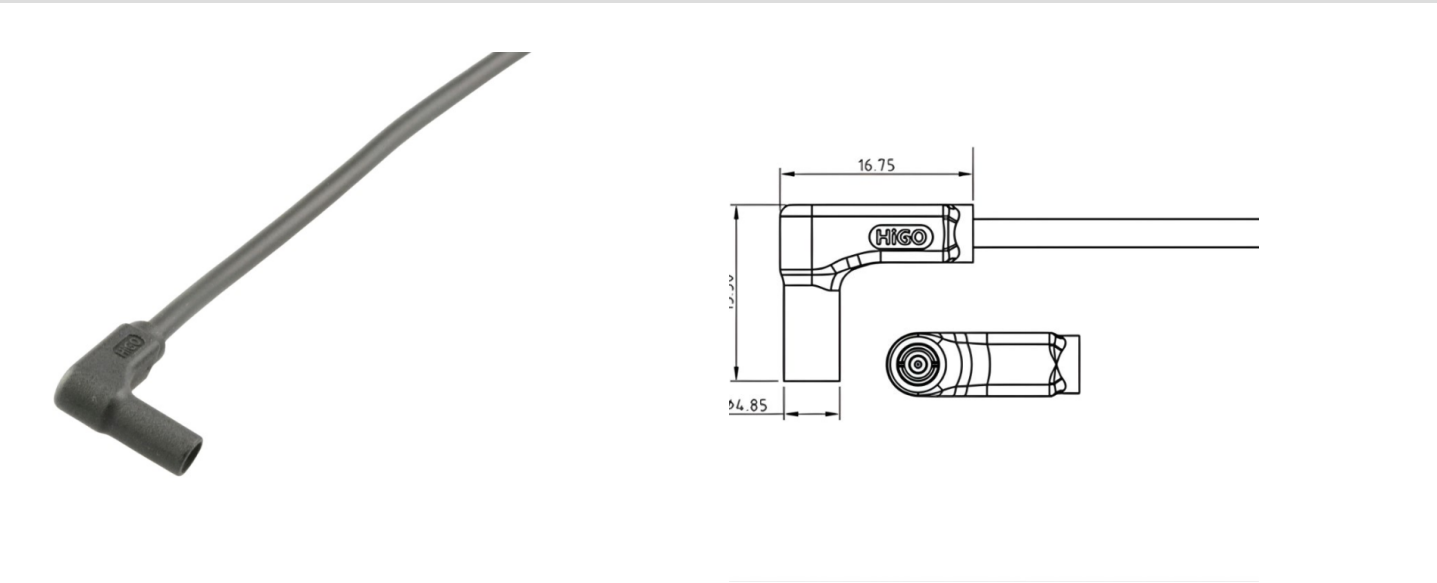

Spezifikationen

General Characteristics

Number of contacts	2
Connector shape	Angled plug
Gender	Male
Color	Black
Upper temperature	80 °C
Lower temperature	-25 °C
Locking	Push-on (no locking)
IP Protection	IP67
Mating cycles	200 Times
Connector diameter	4,8 mm
Cable Length	1000 mm
Cable diameter	2,80 mm
Remark	Other cable length/type on request

Produktdatenblatt

Higo - Signal - Micro A

Micro A male angled plug



Wire section in AWG

2 x 26 (UL20167) AWG

Produktdatenblatt

Higo - Signal - Micro A

Micro A male angled plug

Electrical Parameters

Rated current	2 A
Rated voltage	48 V AC / 60 V DC
Max. insulation resistance	$\geq 20 \text{ M}\Omega$
Max. contact resistance	$\leq 10 \text{ m}\Omega$

Material

Material jacket	PVC
Insulation wire	FEP
Material of contact	Copper Alloy
Contact plating	Gold over Nickel