


Higo - Signal - Z707D

Male cable connector

Z707DG P 00 E9 1000

<https://www.higoconnector.com/de/e-bike-steckverbinder/z707dgp00e91000>

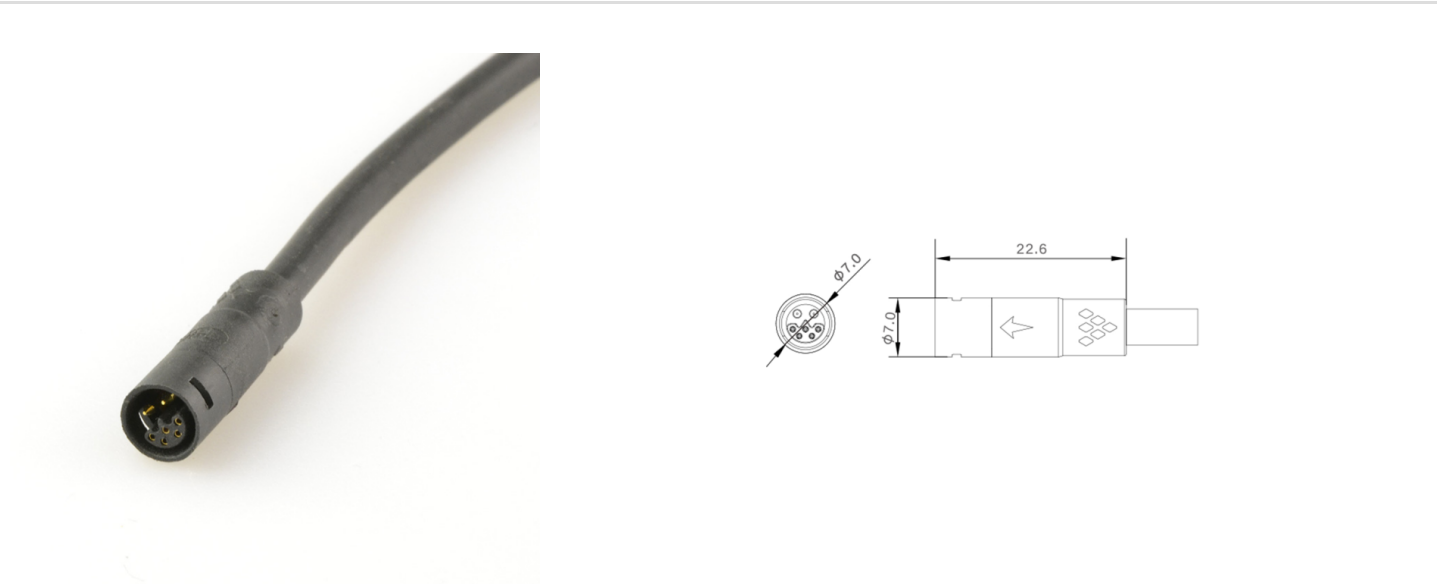

Spezifikationen

General Characteristics

Number of contacts	7 (2+5)
Connector shape	Plug
Gender	Male
Upper temperature	80 °C
Lower temperature	-25 °C
Locking	Push-on (no locking)
IP Protection	IP67
Mating cycles	200 Times
Fitting length	40 mm
Cable Length	1000 mm
Terminal type	NA

Produktdatenblatt

Higo - Signal - Z707D

Male cable connector

Electrical Parameters

Rated current	5 / 2 A
Rated voltage	48V AC/DC
Max. insulation resistance	$\geq 20 \text{ M}\Omega$
Max. contact resistance	$\leq 10 \text{ m}\Omega$
Withstanding voltage	500 V

Material

Material jacket	TPU
Insulation wire	FEP
Contact plating	Gold