


# Product data sheet

## Higo - Signal - Micro X

### Micro X male cable connector

Z205XG P 00 DS 1000

<https://www.higoconnector.com/en/e-bike-connector/z205xgp00ds1000>

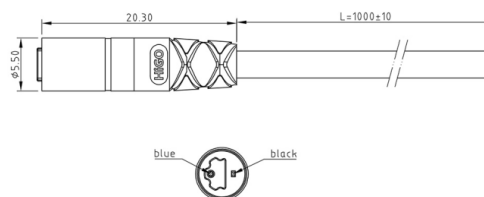

## Specifications

### General Characteristics

Number of contacts	2
Connector shape	Plug
Gender	Male
Color	Red
Upper temperature	80 °C
Lower temperature	-25 °C
Locking	Push-on (no locking)
IP Protection	IP67
Mating cycles	200 Mating times
Connector diameter	5.5 mm
Fitting length	36 mm
Cable Length	1000 mm
Cable diameter	2.4 mm
Wire section	2 x 0,14 mm <sup>2</sup>
Terminal type	IP67
Remark	Other cable length/type on request

# Product data sheet

**Higo - Signal - Micro X**

**Micro X male cable connector**



# Product data sheet

## Higo - Signal - Micro X

### Micro X male cable connector

#### Electrical Parameters

<b>Rated current</b>	2 A
<b>Rated voltage</b>	48 V AC / 60 V DC
<b>Max. insulation resistance</b>	$\geq 20 \text{ M}\Omega$
<b>Max. contact resistance</b>	$\leq 10 \text{ M}\Omega$

#### Material

<b>Material jacket</b>	PVC
<b>Insulation wire</b>	FEP
<b>Material of contact</b>	Copper Alloy
<b>Contact plating</b>	Gold over Nickel