# Product data sheet

## Higo - Motor - Z910A

### Male cable connector

Z910AG P 00 AE 1000
https://www.higoconnector.com/en/e-bike-connector/z910agp00ae1000

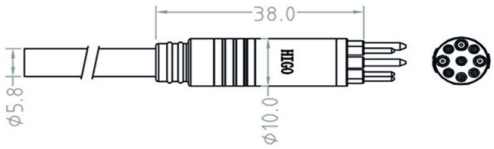


## Specifications

### General Characteristics

| | |
|---|---|
| **Number of contacts** | 9 (3+6) |
| **Connector shape** | Plug |
| **Gender** | Male |
| **Color** | Black |
| **Upper temperature** | 80 °C |
| **Lower temperature** | -25 °C |
| **IP Protection** | IP66 |
| **Mating cycles** | 200 Times |
| **Connector diameter** | 13 mm |
| **Fitting length** | 75 mm |
| **Cable Length** | 1000 mm |
| **Cable diameter** | 5.8 mm |
| **Wire section** | 3 x 1,2 + 6 x 0,2 mm² |
| **Remark** | Other cable length/type on request |

# Product data sheet

## Higo - Motor - Z910A

### Male cable connector

## Electrical Parameters

| | |
|---|---|
| **Rated current** | 15 / 2 A |
| **Rated voltage** | 48 V AC / 60 V DC |
| **Max. insulation resistance** | ≥20 MΩ |
| **Max. contact resistance** | ≤10 mΩ |

## Material

| | |
|---|---|
| **Material jacket** | PVC |
| **Insulation wire** | Teflon |
| **Material of contact** | Copper Alloy |
| **Contact plating** | Gold over Nickel |